



### PHYSICAL SPECIFICATION

Nominal Voltage		2V
Nominal Capacity(10HR)		2000AH
Dimension	Length	330±2mm (13.00inches)
	Width	320±2mm (12.60inches)
	Container Height	619±2mm (24.37inches)
	Total Height	665±2mm (26.18inches)
Weight		Approx 160.Kg (352 lbs)
Standard Terminal		B3(Bolt-and-nut lead Terminal) Bolt Type : M10

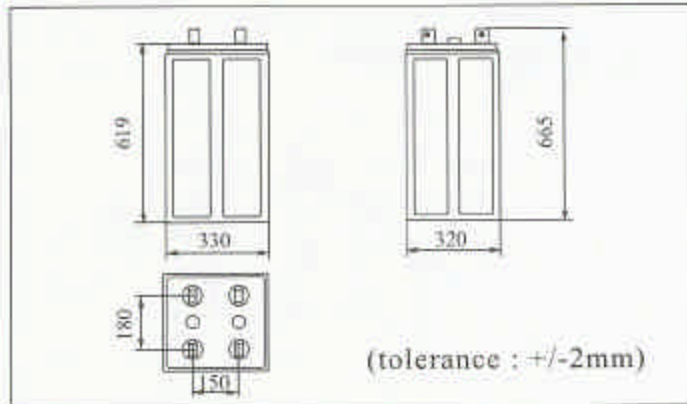

B3 ( Bolt-and-nut lead terminal)  
Bolt Type: M10

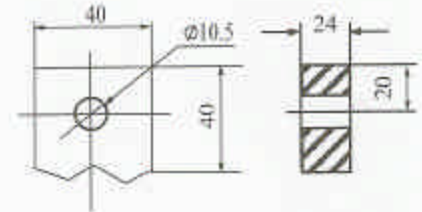

### ELECTRICAL SPECIFICATION

Capacity	20 hour rate(100A)	2060Ah
	10 hour rate(200A)	2000Ah
	5 hour rate(340A)	1700Ah
	3 hour rate(500A)	1500Ah
	1hour rate(1200A)	1200Ah
	Capacity affected by temperature	40 °C (104°F)
	25 °C (77°F)	100%
	0 °C (32°F)	85%
Internal Resistance	Fully charged battery(25 °C, 77°F)0.5mΩ	

It is recommended to use constant-voltage charge and recharge immediately after use

Constant-Voltage Charge	Cycle	Initial Charging Current less than 300A Voltage 14.1V-14.4V at 25 °C (77°F) Temperature Coefficient -18mV/°C
	Standby	No limit on Initial Charging Current Voltage 13.5V-13.8V at 25 °C (77°F) Temperature Coefficient -18mV/°C

